


EFM.. EKFM

<p>Firemans Switch for remote override of ventilation plant in the event of fire. All standard types have red colour enclosures.</p>		<p>EFM-1 Fits square outlet box Protrudes 20mm from wall. Enclosure Flammability = UL94-V0</p> <p>EFM-4/5 Enclosure Flammability = Metal</p> <p>EKFM Transparent Plastic lid. Enclosure Flammability = UL94-HB</p>
--	--	--

Type	Description	Mounting	Switch rating 230VAC	Operation 3 position	Enclosure
EFM-1	Key Operated (includes 2 keys)	Flush *	2 x 10(2)A SPST Volt Free	Normal - Off – Extract	IP40
EKFM	Keyguard for EFM-1	Surface	Once fitted, break lid to access key - see accessories for replacement		IP00
EFM-4	Knob Operated (safe breakglass)	Surface	1 x 10(2)A SPDT Volt Free	Normal - Off – Extract	IP43
EFM-5	Knob Operated (safe breakglass)	Flush	1 x 10(2)A SPDT Volt Free	Normal - Off – Extract	IP40



Special Versions available on request.

DIMENSIONS:

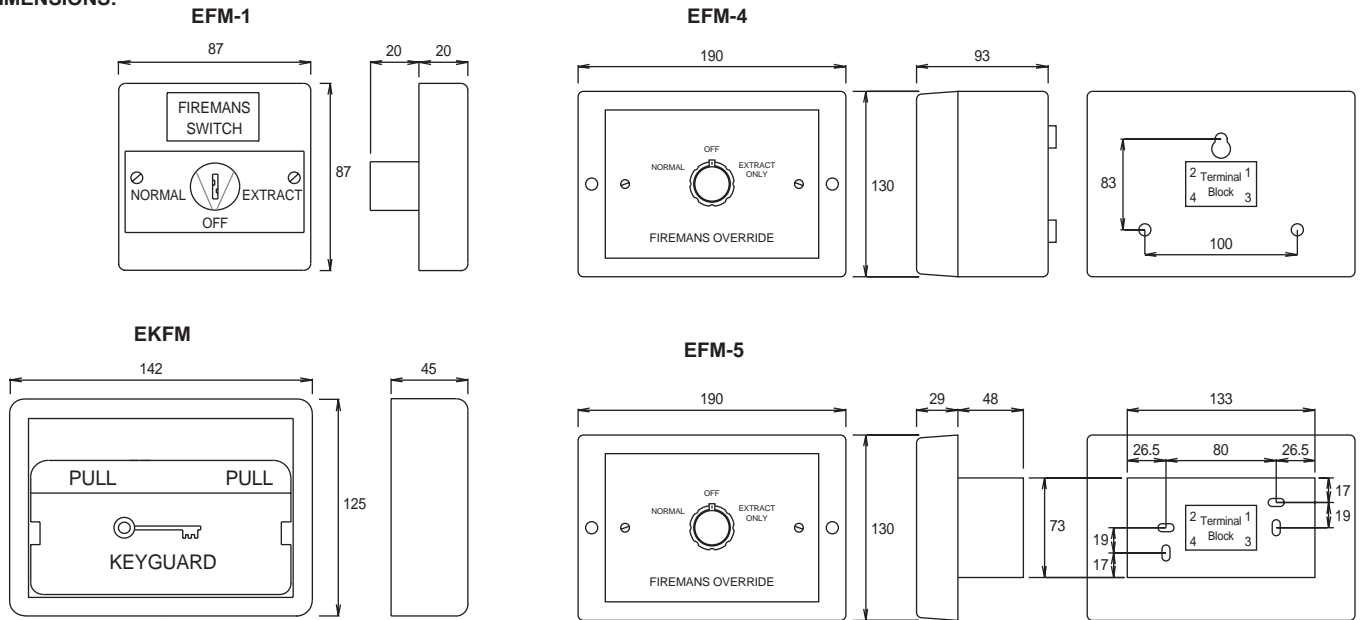


ACCESSORIES: * **EE-BP6** - Surface mounting backbox for EFM-1

EE-KF - Replacement Lid for EKFM 4 per pack



WIRING:

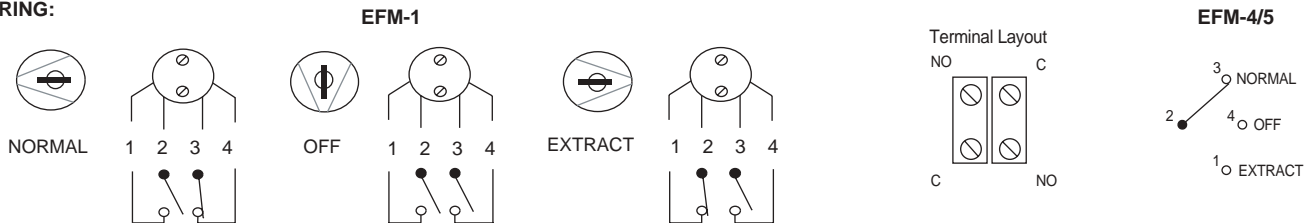

CAUTION: These products may be connected to 230VAC supply. On 24VAC device do not exceed rated voltage supply. Isolate device from electrical supply before removing cover. Always ensure the device operates correctly. If failure of the device can cause damage a safety backup control should be fitted. All data is for guidance purposes only, subject to change without prior notice and not guaranteed to be absolutely correct unless confirmed by us in writing.

Device should be checked by a qualified technician before applying any voltage. Observe all relevant safety precautions, wiring/earthing regulations and electrical ratings.